

UNCOMPROMISED DETECTION FOR FAST SECURITY SCREENING OF LARGE GROUPS OF PEOPLE.

IP65 - FULLY WEATHERPROOF AS
STANDARD

LIGHTWEIGHT AND ROBUST
MOBILE MULTI-ZONE

ASSEMBLE/DISASSEMBLE IN FIVE
MINUTES - NO TOOLS REQUIRED

UNCOMPROMISED DETECTION
CAPABILITY

USER FRIENDLY AND TROUBLE FREE

BATTERY OPERATION

MARKETS

- Customs and Border Control
- Defense
- Critical Infrastructure
- Event Security
VIP Protection
- Commercial
Entertainment Facilities



THE METOR 6WP IS A VERSATILE, STATE-OF-THE-ART METAL DETECTOR THAT COMBINES ADVANCED METAL DETECTION TECHNOLOGY WITH AN APPEALING, BUT PRACTICAL DESIGN.

The Metor 6WP is an excellent choice for temporary and permanent installations, for both outdoor and indoor applications.

SECURITY FOR LARGE CROWDS

Due to superb discrimination features, the Metor 6WP is well suited for fast security screening of large groups of people. To assist security personnel in locating threat objects accurately and consistently, the Metor 6WP is equipped with two zone displays.

WIDE RANGE OF APPLICATIONS

The Metor 6WP combines a high performance metal detector with compact and durable mechanics as well as a stylish appearance that is suitable for even the most architecturally demanding environments. An IP65 protection class makes the Metor 6WP ideal for outdoor use.

MOBILE SECURITY

The mechanics of the Metor 6WP are specifically designed to endure multiple installations in various locations. The unit is simple to install and can be set up by one person in five minutes. Due to its compact structure and light weight design, the Metor 6WP can easily be transported from location to location without any tools for set up or dismantle. As an extra benefit for temporary applications, the unit can be transported while fully assembled. The Metor 6WP comes with ground stabilizers standard and optional carrying cases.

USER FRIENDLY

The Metor 6WP has a menu-based user interface that enables fast and easy programming. The user can calibrate the unit using pre-set detection programs and automated frequency / sensitivity adjustments or operate the unit with pre-defined calibration that is saved in the unit's memory.

As a safety feature, the Metor 6WP incorporates a calibration guard that monitors parameter settings. In addition, the unit's cables and connectors are locked inside the crosspiece. The Metor 6WP is equipped with a power guard that alarms when the unit loses power, (e.g., if the power cord becomes disconnected).


TROUBLE-FREE OPERATION

With its immunity to electromagnetic interference and, the Metor 6WP is easy to install in the most demanding environments. Several units can be placed in close proximity to one another, increasing the level of flexibility when planning an installation site.

TRUE TRAFFIC COUNTERS

The Metor 6WP features intelligent traffic and alarm counters that calculate traffic flow and resultant alarms. Counters are integrated inside the zone display, counting both increment and decrement, thereby giving a true traffic count.

METOR 6WP

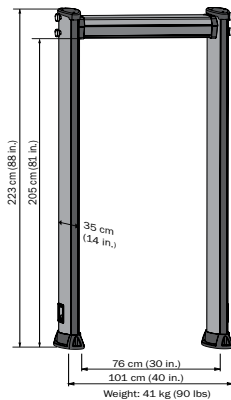

CONFORMITY

Safety Standards	Meteor 6WP has been tested against and complies with applicable magnetic field standards concerning human exposure and pacemaker safety.
Safety Act	Rapiscan Systems products have been certified by the U.S. Department of Homeland Security for Support Anti-Terrorism by Fostering Effective Technologies (SAFETY) Act of 2002, which provides important benefits to organizations that deploy security technology. For additional information visit www.safetyact.gov
CE Compliant	Conforms to the applicable international standards for electrical safety and EMC.

SPECIFICATIONS

Ambient Operating Temperature	From -20° C to + 60° C (From -4° F to +140° F)
Humidity	0 to 100% RH
Protection	IP65 (IEC 60529)
Power Supply	Mains: 90 - 264 VAC / 50-60 Hz Battery (optional): 12 VDC Consumption, typical: 40 W (AC), 30 W (DC)
Alarm	Adjustable audible and visual alarm. 2 x 20 character alphanumeric display and zone display. Alarm relay contact.
Sensitivity	100 sensitivity steps in each program. Separate floor level sensitivity adjustment.
Calibration	Automatic Sensitivity Calibration for overall sensitivity and Automatic Floor Sensitivity Calibration or manual sensitivity setting. An automatic sensitivity function selects the appropriate sensitivity for a specific weapon or test object. This eliminates the time consuming trial and error method.
Interference Suppression	Digital filtering. Multiple operation frequencies. Automatic Frequency Search.
Power Guard	Monitors the input power giving a warning when the unit loses power.
Calibration Guard	Monitors calibration parameters and gives a warning when any of the saved calibration parameter values are changed.
Self-Testing Diagnostics	User-friendly diagnostics identify fault condition.
Network Connections	MeteorNet Remote Security Monitoring System compatible (Ethernet)
Dimensions	Interior: 76cm (30 in.) Width x Interior: 205 cm (81 in.) Height Exterior: 101 cm (40 in.) Width x 223 cm (88 in.) Height x 35 cm (14 in.) Depth
Weight	41 kg (90 lbs.)
Shipping Weight & Volume	Total: shipping weight: 69 kg (152 lbs) shipping volume: 0.36 m ³ (12.7 cu ft) Coils: shipping weight: 53 kg (117 lbs) shipping volume: 0.29 m ³ (10.2 cu ft) Crospiece + electronics: shipping weight: 16 kg (35 lbs) shipping volume: 0.07 m ³ (2.5 cu ft)

AMERICAS, CARIBBEAN

2805 Columbia Street
Torrance,
California
90503

UNITED STATES of AMERICA

Tel: +1 310-978-1457
Fax: +1 310-349-2491

EUROPE, MIDDLE EAST, AFRICA

X-Ray House
Bonehurst Road
Salfords
Surrey RH1 5GG

UNITED KINGDOM

Tel: +44 (0) 870-7774301
Fax: +44 (0) 870-7774302

ASIA

240 Macpherson Road
#07-01 Pines Industrial Building
Singapore
348574

SINGAPORE

Tel: +65-6846-3511
Fax: +65-6743-9915

Rapiscan[®]
systems
An OSI Systems Company

STANDARD

- Stabilizer set to provide more stable footing.

OPTIONS AND ACCESSORIES

- Battery Backup: Up to 8 hours of runtime when no power is available.
- Remote Control Unit: A bi-directional remote control unit enables easy programming as well as copying of the parameters from one unit to other units. This control unit, unique only to the Meteor brand of walk-through metal detectors, makes programming several detectors fast and easy. The operation of the control unit is secured with passwords and a code-hopping encryption algorithm to prevent unauthorized access.
- Integrated Traffic Lights: The Meteor 6WP can be equipped with clearly marked traffic lights on the crosspiece to optimize the traffic flow and speed up the throughput rate.
- ADA Compliant Crosspiece: 32 in. crosspieces are available to meet ADA compliance for wheelchair accessibility.
- MeteorNet 3 Pro Web: A Remote Security Management System that collects the statistics on traffic flow and alarm data of Meteor walk-through metal detectors and generates easy-to-read reports.
- Test Pieces: to assist in calibration and testing
- Remote Display Set: for convenient remote monitoring and operation of the unit.
- Carrying Bags: for easy to transport from storage to screening site of strong dirt resistant Polyester material.
- Adjustable Stabilizers: for uneven surfaces.
- Wheels: for additional mobility.
- Cover: for additional protection against elements when stored outdoors.
- Soft shell storage and transportation container: for additional protection
- Tie-down kit: for fixing the unit firmly to the ground in extreme weather conditions.

With continual development of our products Rapiscan Systems reserves the right to amend specifications without notice. Product pictures are for general reference. Please note that due to US laws and regulations, not all Rapiscan products are available for sale in all countries without restriction. Please contact your Rapiscan Systems sales representative for more information.



Rapiscan Systems is ISO 9001:2008 Certified

sales@rapiscansystems.com
www.rapiscansystems.com