

TSA BM185

Waste monitor with flexible options to scan small items for radioactive emissions.

High Sensitivity Waste Monitor for Small Items

Efficient, Accurate Analysis

Touchscreen Operation

Cost Effective



The TSA BM185 is designed to scan small items (less than 1 ft.³) for radioactive emissions and is ideal for monitoring prior to release from the facility. With an efficient and accurate go/no go analysis and typical scan times of one to three minutes, the TSA BM185 waste monitor allows for efficient and cost effective waste management.

Advanced Design Features

The TSA BM185 provides 4pi geometry and efficiency of greater than 45% for ⁶⁰Co for effective and accurate screening of all sides of the item. The monitor's high sensitivity and uniform measurement is achieved by using large surface area plastic scintillator detectors on all six sides of the counting chamber. With lead shielding on all sides, the BM185 provides higher sensitivity and isolates the scanned item from any external radiation influence. Designed for minimal maintenance, the TSA BM185's electronics are mounted above the chamber for easy access. The touchscreen panel PC is mounted on an arm that allows for ease of movement while protecting the touchscreen.

Programmable Detection Parameters

With the ability for an administrator to define screening parameters, customizing the BM185 for specific radioactive isotopes or 'waste streams' is possible. The operator selects the proper waste stream from an annotated list for each item to be scanned making the BM285 flexible when screening for multiple contaminants.

Easy-to-Operate

Operation is simple using the color touchscreen panel PC. Easy to read graphics provide instant reporting of system status and operating mode. Administrators can generate reports for all activity or only alarmed activity for efficient record keeping on waste disposal.

Flexible Options

The BM185 comes standard with a stainless steel liner that protects the detectors and allows for easy cleaning if contaminated. An optional aluminum liner is available if greater sensitivity is required. With the optional sodium iodide detector, spectral isotopic identification to fit specific detection requirements is possible.

Standard Features

- 4pi Detector Geometry
- Stainless Steel Liner
- Lead Shielding on all Sides
- 20 Programmable Waste Streams
- User-Friendly Operator Interface
- Color Touchscreen Panel PC
- Keyboard (US English)
- Heavy Duty Casters

Markets

- Critical Infrastructure
 - Hospitals
 - Nuclear Facilities
- Defense


Rapiscan[®]
systems
An OSI Systems Company

TSA BM185

Specifications

Sensitivity	See the Minimum Detectable Activity Chart below
Detectors	Six 12 h x 12 w x 1.5 d in. (30 x 30 x 3.75 cm) plastic scintillator detectors, provides 1,296 in ³ (21 liters) of detector volume per system. Gamma energy range is 30 keV to 2 MeV.
Display	Fifteen inch panel PC, color monitor, with touch screen
Power Requirements	115/230 Vac, 47-63 Hz, <500 VA
Dimensions	40 h x 27 x 26 d in. (1,060 x 660 x 685 mm) not including side mount PC
Chamber Dimensions	11.75 h x 11.75 w x 12 d in. (30 x 30 x 30 cm)
Volume	Approximately 1 ft ³ (28 liters)
Weight	Approximately 1,800 lbs (820kg)
Environmental	32° to 100° F (0° to 38° C)

Minimum Detectable Activity Chart

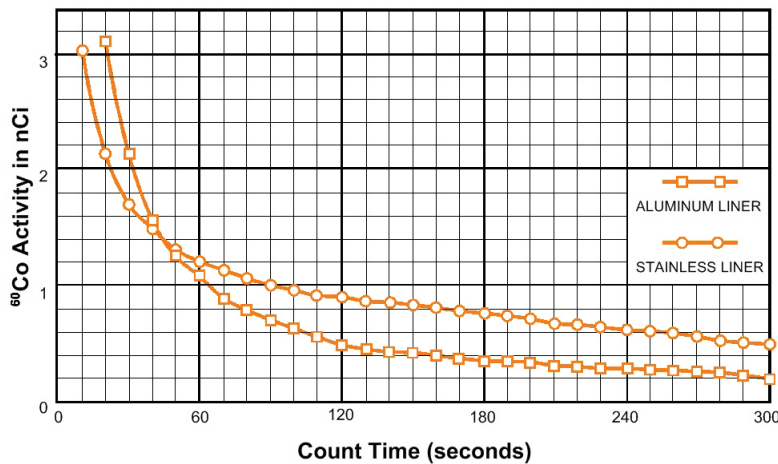

Confidence of Detection 90% (1.3 sigma)
 False Alarm Rate 1/100 (2.33 sigma)
 2% micro/hour background Eff. - 38%

Options

- Aluminum Liner: provides minimum attenuation
- Internal scale
- Printer

With continual development of our products Rapiscan Systems reserves the right to amend specifications without notice. Product pictures are for general reference. Please note that due to US laws and regulations, not all Rapiscan products are available for sale in all countries without restriction. Please contact your Rapiscan Systems sales representative for more information.

Rapiscan[®]
 systems

An OSI Systems Company

ONE COMPANY - TOTAL SECURITY

www.rapiscansystems.com

RAPISCAN RADIATION DETECTION PRODUCT LINE HEADQUARTERS

14000 Mead Street
 Longmont, Colorado 80504
 UNITED STATES OF AMERICA
 Tel: +1 970-535-9949
 Fax: +1 970-535-3285

AMERICAS, CARIBBEAN

2805 Columbia Street
 Torrance, California 90503
 UNITED STATES OF AMERICA
 Tel: +1 310-978-1457
 Fax: +1 310-349-2491

EUROPE, MIDDLE EAST, AFRICA

X-Ray House
 Bonehurst Road
 Salfords
 Surrey RH1 5GG
 UNITED KINGDOM
 Tel: +44 (0) 870-7774301
 Fax: +44 (0) 870-7774302

ASIA

240 Macpherson Road
 #07-01 Pines Industrial Building
 Singapore 348574
 SINGAPORE
 Tel: +65-6846-3511
 Fax: +65-6743-9915

EMAIL

sales@rapiscansystems.com

WEB

www.rapiscansystems.com



Rapiscan Systems is
 ISO 9001:2008 Certified